

## Ultraviolet Water Purification System



Basic



Monitored

The quality of drinking water can change with time and become contaminated with harmful bacteria. The Sterilight Cobalt™ system is a reliable, economical and chemical-free way to safeguard drinking water in any residential application. The Sterilight Cobalt™ system has been designed and tested to ensure quality drinking water is at everyone's finger tips.

[www.camix.com.vn](http://www.camix.com.vn)

### Features of the Sterilight Cobalt UV purification system


- Equipped to inactivate chlorine-resistant parasites such as *Cryptosporidium* and *Giardia*, harmful bacteria like *E.Coli* and viruses not visible to the naked eye.
- Specially designed and tested Sterilume™ -HO lamps provide consistent and reliable ultraviolet output over the entire life of the lamp (9000 hours) to ensure continuous purification.
- The system is easy to maintain and service.
- The ultraviolet lamp can be changed without interrupting the water flow.
- Built with a durable stainless steel chamber to prolong life and eliminate ultraviolet light degradation.
- The Cobalt™ ICE power supply visually displays the remaining lamp life and will go into alarm if the lamp fails to notify the homeowner. Monitored systems also have the ability to read the percentage of UV output.
- The power supply has a sealed case to prevent damage from accidental water intrusion and is fully CSA and CE compliant.
- Monitored systems have a specialized 254nm UV intensity sensor which notifies homeowner of changes in UV performance.
- Monitored systems have an optional solenoid valve which will stop the flow of water through the chamber should any changes in the UV performance falls below a safe level.

# SPECIFICATIONS

MODEL	SC-200/ SCM-200	SC-320/ SCM-320	SC-600/ SCM-600	SC-740/ SCM-740
<b>FLOW RATES<sup>1</sup></b>				
US Public Health (16 mJ/cm <sup>2</sup> )	75.7 lpm (20 gpm) (4.5 m <sup>3</sup> /hr)	128.7 lpm (34 gpm) (7.7 m <sup>3</sup> /hr)	227.1 lpm (60 gpm) (13.6 m <sup>3</sup> /hr)	227.1 lpm (60 gpm) (13.6 m <sup>3</sup> /hr)
VIQUA Standard (30 mJ/cm <sup>2</sup> )	37.9 lpm (10 gpm) (2.3 m <sup>3</sup> /hr)	68.1 lpm (18 gpm) (4.1 m <sup>3</sup> /hr)	132.5 lpm (35 gpm) (7.9 m <sup>3</sup> /hr)	158.9 lpm (42 gpm) (9.5 m <sup>3</sup> /hr)
NSF/EPA (40 mJ/cm <sup>2</sup> )	30.3 lpm (8 gpm) (1.8 m <sup>3</sup> /hr)	49.2 lpm (13 gpm) (2.9 m <sup>3</sup> /hr)	98.4 lpm (26 gpm) (5.9 m <sup>3</sup> /hr)	117.3 lpm (31 gpm) (7.0 m <sup>3</sup> /hr)
<b>DIMENSIONS</b>				
Reactor	45.2 cm x 8.9 cm (17.8" x 3.5")	57.9 cm x 8.9 cm (22.8" x 3.5")	78.0 cm x 8.9 cm (30.7" x 3.5")	100.0 cm x 8.9 cm (39.4" x 3.5")
Controller	24.1 cm x 8.1 cm x 6.4 cm (9.4" x 3.2" x 2.5")	24.1 cm x 8.1 cm x 6.4 cm (9.4" x 3.2" x 2.5")	24.1 cm x 8.1 cm x 6.4 cm (9.4" x 3.2" x 2.5")	24.1 cm x 8.1 cm x 6.4 cm (9.4" x 3.2" x 2.5")
Inlet/Outlet Port Size	Combo - 3/4" FNPT/1" MNPT	Combo - 3/4" FNPT/1" MNPT	1" MNPT	1.5" MNPT
Shipping Weight	5.4 kg (12 lbs.)	6.8 kg (15 lbs.)	8.6 kg (19 lbs.)	10.9 kg (24 lbs.)
<b>ELECTRICAL</b>				
Voltage	100-240V/50-60Hz	100-240V/50-60Hz	100-240V/50-60Hz	100-240V/50-60Hz
Power Consumption	35 W	42 W	73 W	88 W
Lamp Watts	27 W	34 W	65 W	80 W
Maximum Operating Pressure	8.62 bar (125 psi)	8.62 bar (125 psi)	8.62 bar (125 psi)	8.62 bar (125 psi)
Ambient Water Temperature	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)
Lamp Type	Sterilume™ - HO (high-output)			
Visual "Power-On"	Yes	Yes	Yes	Yes
Audible Lamp Failure	Yes	Yes	Yes	Yes
Lamp Replacement Reminder	Yes	Yes	Yes	Yes
Visual Lamp Life Remaining	Yes	Yes	Yes	Yes
Total Running Time	Yes	Yes	Yes	Yes
Chamber Material <sup>2</sup>	304 SS	304 SS	304 SS	304 SS
<b>SCM MODELS ONLY</b>				
254nm UV Monitor	Yes	Yes	Yes	Yes
Solenoid Output ( <i>solenoid not included</i> )	Yes	Yes	Yes	Yes
4-20 mA Output	Yes (optional 260134)			

<sup>1</sup> Flow rates stated @ 95% UVT EOL

<sup>2</sup> 316 stainless steel available on request

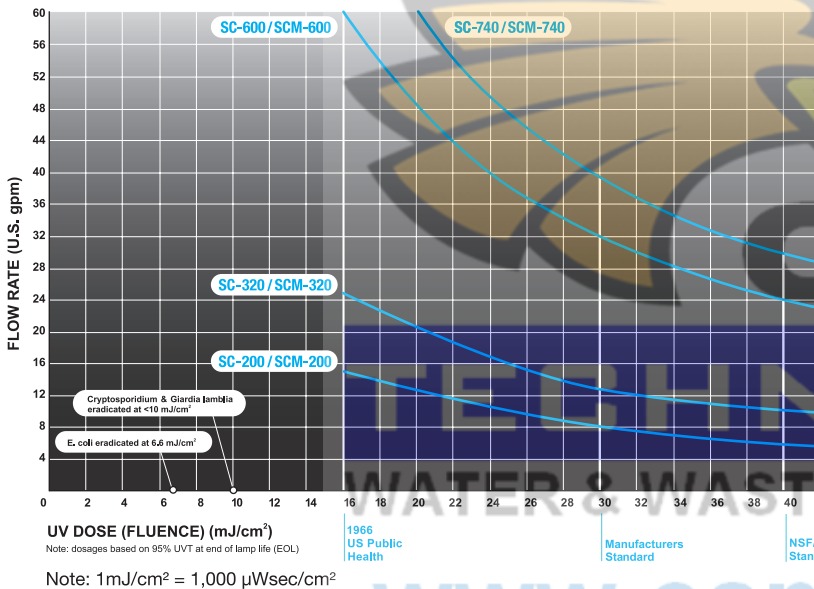

## Replacement Parts

- S200RL-HO** – UV lamp for SC-200/SCM-200
- S320RL-HO** – UV lamp for SC-320/SCM-320
- S600RL-HO** – UV lamp for SC-600/SCM-600
- S740RL-HO** – UV lamp for SC-740/SCM-740
- QS-200** – quartz sleeve for SC-200/SCM-200
- QS-320** – quartz sleeve for SC-320/SCM-320
- QS-600** – quartz sleeve for SC-600/SCM-600
- QS-740** – quartz sleeve for SC-740/SCM-740
- 410867** – o-ring for all quartz sleeves
- RN-001** – gland-nut for all systems
- BA-ICE-C** – electronic ICE controller (100-240V/50-60Hz.)
- BA-ICE-CM** – electronic ICE monitored controller (100-240V/50-60Hz.)
- 254NM-C1** – UV monitor assembly for Cobalt "Plus" series

## Warranty

Please visit [www.viqua.com](http://www.viqua.com) for the comprehensive warranty for our Sterilight product line.